DESCRIPTION

Insulated ceiling AirTite housing for 5" Accurus round trim fixtures. For 12V MR16 71 watts max.

For insulated ceiling applications. Rated for direct contact with insulation material.

Catalog #		**Type**
Project		
Comments		**Date**
Prepared by		

SPECIFICATION FEATURES

A ...Housing
Housing and plaster frame: 18 gauge CRS with flat black powder coated internal finish. Adjustable plaster frame can accommodate up to 1" ceiling thickness.

B ...System Protection:
Thermal protection provided.

C ...Electrical
Integral j-box and electronic or magnetic low voltage transformer. 120V or 277V input, 12V output. Junction box is U.L. listed for through branch wiring. Includes five 1/2 trade size knockouts (six knockouts when magnetic xfmr. is specified)

D ...Lamp
12V MR16 50 watts max. (not included)
Internal rotation ring with locking adjustment. Provides 360° rotation of trim and secures original trim position after relamping. "POSI-GRIP" bi-pin lamp socket for firm, mechanical lamp connection.

E ...Mounting
Hanger Bars and Butterfly Brackets included for residential and commercial applications respectively.

Ceiling Cut-Out: 4.50" dia.

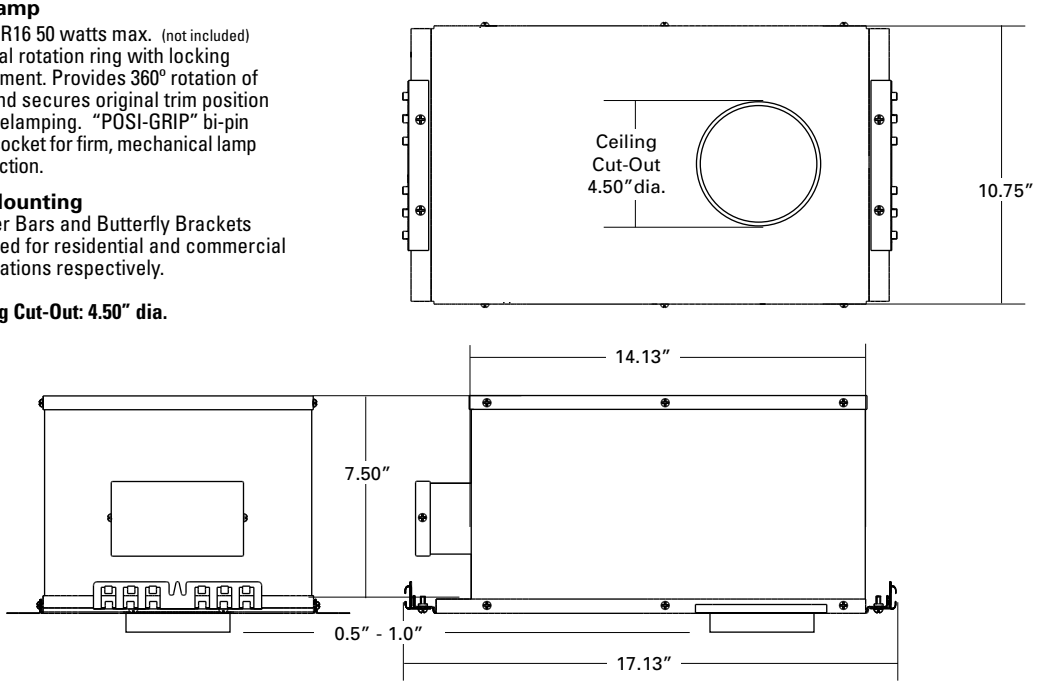

ACCURUS HOUSING

ACT952IC
Insulated Ceiling AirTite Housing for Round Trim

FOR 12V MR16 50 watts max.

c UL us

ORDERING INFORMATION

ACT952IC		
Housing **ACT952IC** = Accurus Insulated Ceiling AirTite Housing for Round Trim w/Integral Transformer	**Transformer** **ELC** = Electronic **MAG** = Magnetic	**Voltage** **120** = 120 volts primary **277** = 277 volts primary